




**Usage in places where there is no land line:**

It allows the Intruder Alarm Panel to make a call to the user or send information to the alarm receiving center over the GSM line.

**Usage in places where there is land line:**

It works as a backup of the land line connected to the Intruder Alarm Panel.

It activates when the land line is interrupted and enables users to be called over the GSM line or continues to send information to alarm receiving center over the GSM network.

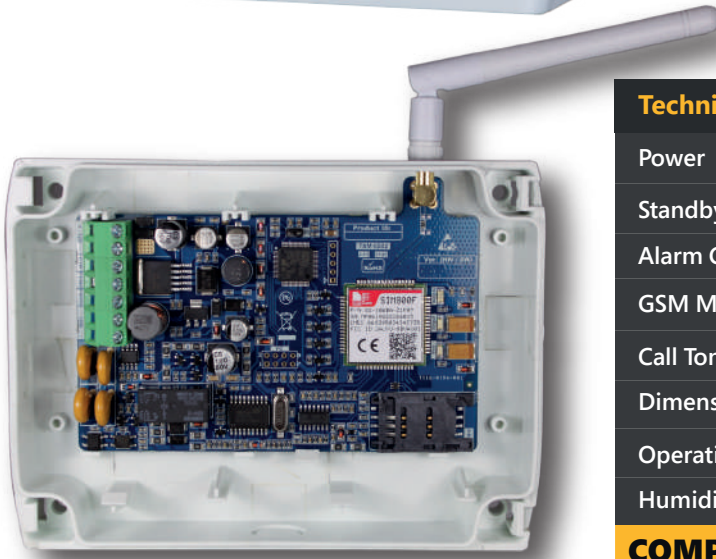

**Technical Specifications**

**TXM-0502**

Power	10-24 VDC 300mA
Standby Consumption	500mA
Alarm Consumption	120mA
GSM Modem Frequency	850/900/1800/1900 Mhz
Call Tone Frequency	380 Hz
Dimensions (mm)	150 x 110 x 35 mm
Operating Temperature	-20°C ~ 55°C
Humidity	95% RH

**COMPATIBLE WITH EVERY BRAND ALARM PANEL**



**PSTN Panel**



**Universal Gsm  
Dialer**



**Users**