TFB-1166
ANALOG ADDRESSABLE MANUAL CALL POINT WITH ISOLATOR, RESETTABLE

EN-54-11 EN-54-17

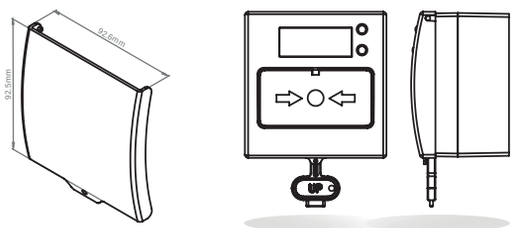

TFB-1166 is a manual call points with isolator. It is suitable for flush and surface mounting. An optional transparent protective cover can be installed. Operated with Teknim TFP-12XX panels using flashlink protocol. In case of short circuit, damage section is removed from the loop line to prevent system (loop line) crash.

TFA-0165 TRANSPARENT PROTECTIVE COVER

The cover is made of robust poly-carbon transparent material. It is used to prevent accidental button activation.





TFB-1166 Technical Specifications	
Standard	EN 54-11/17
Operating Type	A Type Manual
Resettable	Yes
Power	10-32VDC
Standby Consumption	1,5mA.
Alarm Consumption	6mA.
Shortcut Isolator Consumption	8mA.
Weight	145gr.
Dimensions (mm)	86x55x88mm
Body Material and Color	RAL3001 RED
Cable Type	0,4mm ~ 2.0mm
Status LED	RED
Status LED	Blue
Isolator LED	Yellow
Type of Fragile Element	Resettable Polycarbonate
Operating Temperature	-10°C ~ 60°C
Humidity	≤93% RH at +40°C
Protection Class	IP30